


Griffin Dust Controller, Dual Compartment 78in x 93in, 2-2in outlets, 3 Doors at 2ft Wide x 4ft High, Max 15 PSIG , Max Temp 140 F, 186in Long x 84in Wide x 96in High



Top Part: 10ft x 7ft x 12ft

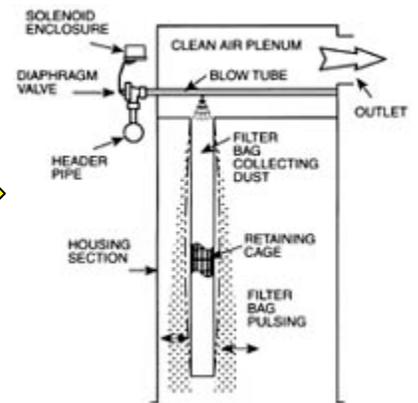

VERSATILE AND EFFICIENT OPERATION

1. Dust laden air enters the collector through the hopper or through a high-entry inlet housing section.
2. An internal baffle distributes the dirty air within the housing, reducing air velocity.
3. Heavier particles drop into the hopper, while lighter particles collect on the outside surface of the bags.
4. Filtered clean air flows to the clean-air chamber and exhausts through the outlet.
5. Periodic compressed-air pulsing removes accumulated dust from the bags with cleaning frequency and duration adjusted by solid-state timers.
6. Dust falls into the hopper for removal through the discharge device.



22 Goyen Controls

264 Filter Cages





264 Filter Couplings