



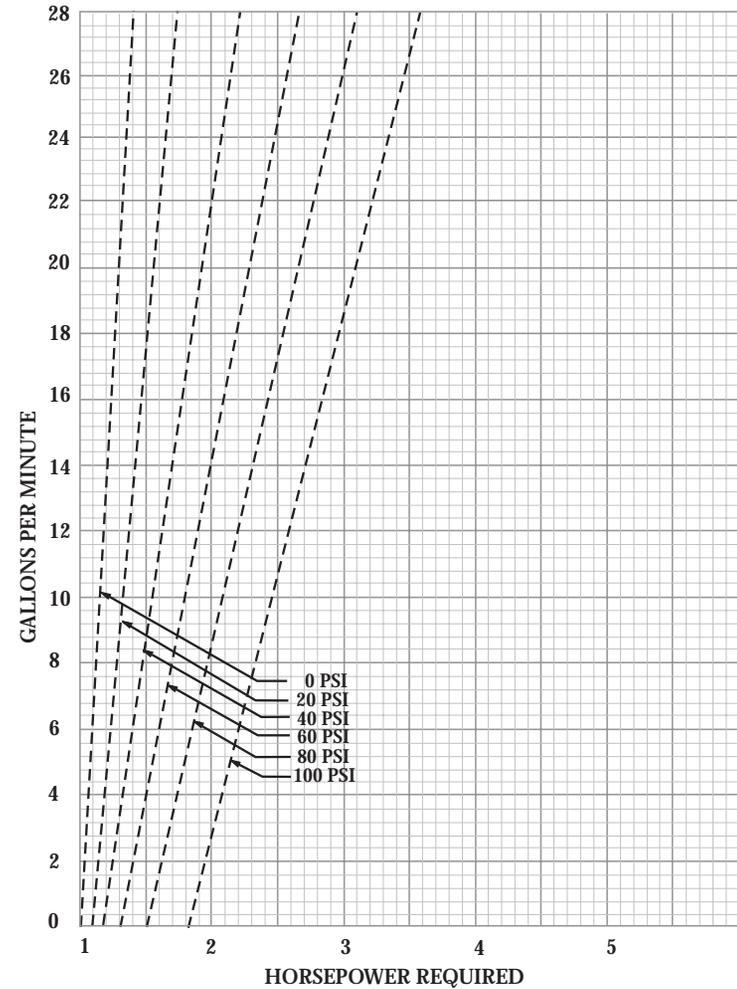

TYPICAL PERFORMANCE CURVE MODEL 25

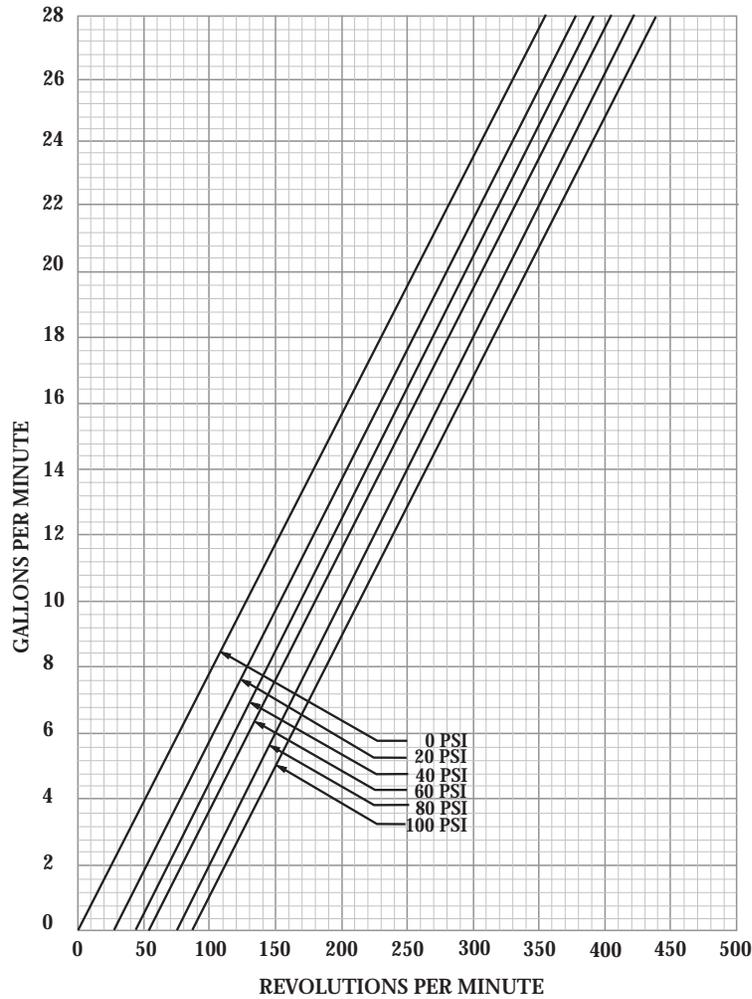

Note: This graph is predicated upon liquids of the viscosity and specific gravity of water and milk at 100°F (34°C). The horsepower ratings are actual brake horsepower. This graph applies to polymer coated rotors only.

Note: All curves are typical performance curves, not Certified, and should be applied for guideline purpose only.

Maximum Flowrate 28 GPM at 20 psi
Pump Displacement per gallons at 100 RPM 8.0
Intake & Discharge Port Size 1 ½" & 3"