
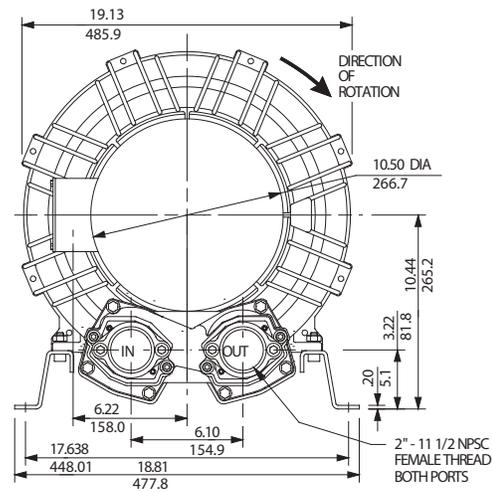


7.5 / 10.0 HP Regenerative Blower

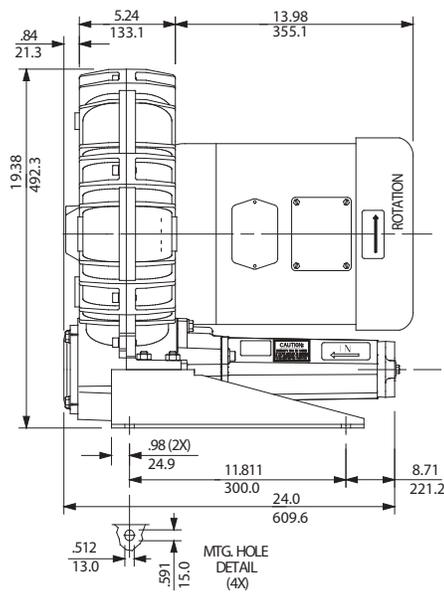

IN
MM

NOTES

- 1 DRAWING NOT TO SCALE, CONTACT FACTORY FOR SCALE CAD DRAWING.
- 2 CONTACT FACTORY FOR BLOWER MODEL LENGTHS NOT SHOWN.

FILTER 515255 INCLUDED

Specification	Units	Part/ Model Number				
		DR833BB72M 081702	DR833BB86M 081704	DR833AY72M 081699	DR833AY86M 081701	CP833FH72MLR 081710
Motor Enclosure - Shaft Mt.	-	TEFC-CS	TEFC-CS	TEFC-CS	TEFC-CS	CHEM TEFC-SS
Horsepower	-	10	10	7.5	7.5	10
Voltage	AC	230/460	575	230/460	575	230/460
Phase - Frequency	-	Three - 60 Hz				
Insulation Class	-	F	F	F	F	F
NEMA Rated Motor Amps	Amps (A)	31-28/14	9.6	23-21/10.5	8.4	31-28/14
Service Factor	-	1.15	1.15	1.15	1.15	1.15
Max Blower Amps	Amps (A)	26-24/12	8.9	21.2-19.2/9.6	7.7	26-24/12
Locked Rotor Amps	Amps (A)	190/95	73	170/85	68	190/95
NEMA Starter Size	-	2/1	1	2/1	1	2/1
Shipping Weight	Lbs	269	269	260	260	269
	Kg	122	122	117.9	117.9	122

Voltage - ROTRON motors are designed to handle a broad range of world voltages and power supply variations. Our dual voltage 3 phase motors are factory tested and certified to operate on both: **208-230/415-460 VAC-3 ph-60 Hz** and **190-208/380-415 VAC-3 ph-50 Hz**. Our dual voltage 1 phase motors are factory tested and certified to operate on both: **104-115/208-230 VAC-1 ph-60 Hz** and **100-110/200-220 VAC-1 ph-50 Hz**. All voltages above can handle a ±10% voltage fluctuation. Special wound motors can be ordered for voltages outside our certified range.

Operating Temperatures - Maximum operating temperature: Motor winding temperature (winding rise plus ambient) should not exceed 140°C for Class F rated motors or 120°C for Class B rated motors. Blower outlet air temperature should not exceed 140°C (air temperature rise plus inlet temperature). Performance curve maximum pressure and suction points are based on a 40°C inlet and ambient temperature. Consult factory for inlet or ambient temperatures above 40°C.

Maximum Blower Amps - Corresponds to the performance point at which the motor or blower temperature rise with a 40°C inlet and/or ambient temperature reaches the maximum operating temperature.

This document is for informational purposes only and should not be considered as a binding description of the products or their performance in all applications. The performance data on this page depicts typical performance under controlled laboratory conditions. AMETEK is not responsible for blowers driven beyond factory specified speed, temperature, pressure, flow or without proper alignment. Actual performance will vary depending on the operating environment and application. AMETEK products are not designed for and should not be used in medical life support applications. AMETEK reserves the right to revise its products without notification. The above characteristics represent standard products. For product designed to meet specific applications, contact AMETEK Technical & Industrial Products Sales department.